




ALUMINIUM SEALED DOME HEAD







BODY: Aluminium Al Mg 5
MANDREL: Steel Lubricated

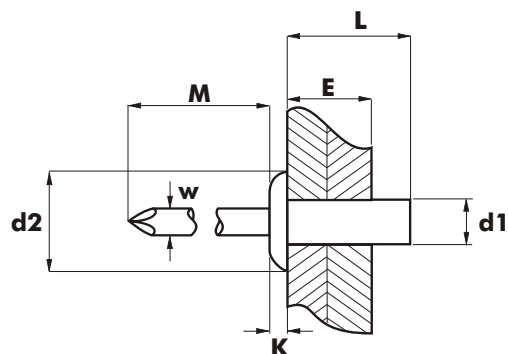


UNE - EN ISO 15973

d1 Ø m/m	L m/m	d2 Ø m/m	K m/m	W Ø m/m	M MÍN. m/m	 E m/m		COD.
3,2	6,5	6,0	0,90	1,70	30,0	0,5 - 2,0 2,0 - 3,5 3,5 - 5,0 5,0 - 6,5 6,5 - 8,0	3,30	01110 00 3206
	8,0							01110 00 3208
	9,5							01110 00 3209
	11,0							01110 00 3211
	12,5							01110 00 3212



d1 Ø m/m	 (N)	 (N)
3,2	1.160	1.400

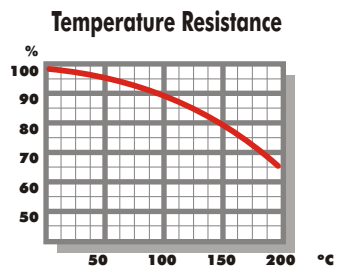

RAL

9010 5001
8014 3005
1015 6021


More sizes



ALUMINIUM SEALED DOME HEAD





BODY: Aluminium Al Mg 5
MANDREL: Steel Lubricated

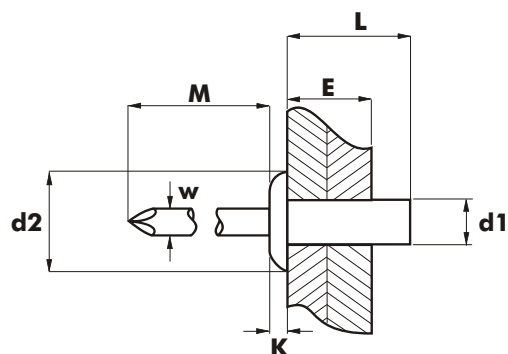


UNE - EN ISO 15973

d1 Ø m/m	L m/m	d2 Ø m/m	K m/m	W Ø m/m	M MIN. m/m	MAX. E m/m		COD.
4,0	8,0	8,0	1,40	2,20	30,0	0,5 - 3,5	4,10	01110 00 4008
	9,5					3,5 - 5,0		01110 00 4009
	11,0					5,0 - 6,5		01110 00 4011
	12,5					6,5 - 8,0		01110 00 4013
	14,5					8,0 - 10,0		01110 00 4014
4,8	8,5	9,5	1,50	2,60	30,0	0,5 - 3,5	4,90	01110 00 4808
	9,5					3,5 - 5,0		01110 00 4810
	11,0					5,0 - 6,5		01110 00 4811
	13,0					6,5 - 8,0		01110 00 4813
	14,5					8,0 - 9,5		01110 00 4814
	16,0					9,5 - 11,0		01110 00 4816
	18,0					11,0 - 13,0		01110 00 4818
	21,0					13,0 - 16,0		01110 00 4821
	25,0					16,0 - 20,0		01110 00 4825
6,4	12,7	12,5	1,80	3,60	30,0	4,0 - 7,0	6,50	01110 00 6413
	15,5					7,0 - 10,0		01110 00 6415



d1 Ø m/m	(N)	(N)
4,0	1.860	2.500
4,8	2.400	3.400
6,4	4.000	4.900

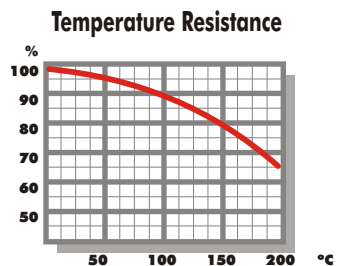

RAL

9010 5001
8014 3005
1015 6021

More sizes

